


CamSorb® RS Glide/Pack®

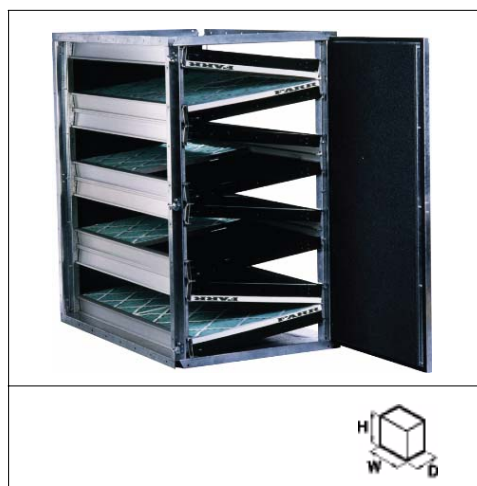

Advantages

- Holds four CamSorb RS80 2" deep adsorber panels and a 1" deep prefilter per 2000 cfm offering medium capacity odor removal
- Side-access housing integrity with dual access doors may be up to four filters high by six filters wide

Typical applications: HVAC system installation in commercial, industrial, manufacturing and medical facilities.

Construction: 16-gauge galvanized steel, gasketed dual access doors, anodized aluminum filter track for four 1" prefilters and four CamSorb RS80 rechargeable or disposable adsorber panels (4 per 2000 cfm), weatherproof.

Filters: 1" MERV 6-8 pleated panel prefilters and 2" adsorber panels filled with coconut shell activated carbon or other optional adsorbent. Ordered separately.

Additional data: Out-turned pre-drilled standing flanges mate to other HVAC equipment.

See Product Sheet 2108 for more details.

Dimensions and Airflow Capacity (cfm)

Number of Filters High	Height (inches)	1 Filter Wide	2 Filters Wide	3 Filters Wide	4 Filters Wide	5 Filters Wide	6 Filters Wide	Housing Depth (inches)
½	15.25	1000	2000	3000	4000	5000	6000	29.75
1	27.25	2000	4000	6000	8000	10000	12000	
1-½	39.50	3000	6000	9000	12000	15000	18000	
2	51.50	4000	8000	12000	16000	20000	24000	
2-½	63.75	5000	10000	15000	20000	25000	30000	
3	75.75	6000	12000	18000	24000	30000	36000	
3-½	88.00	7000	14000	21000	28000	35000	42000	
4	100.00	8000	16000	24000	32000	40000	48000	
	Width (inches)	24	48	72	96	120	144	

As part of our program for continuous improvement, Camfil Farr reserves the right to change specifications without notice.